


# Hydrostatic Level Transmitter MODEL: SB-HL

## SMART BIENE.



Smart Biene Inc., 250 East Main Street, Stuttgart, Germany.  
Email: [info@smartbiene.com](mailto:info@smartbiene.com)

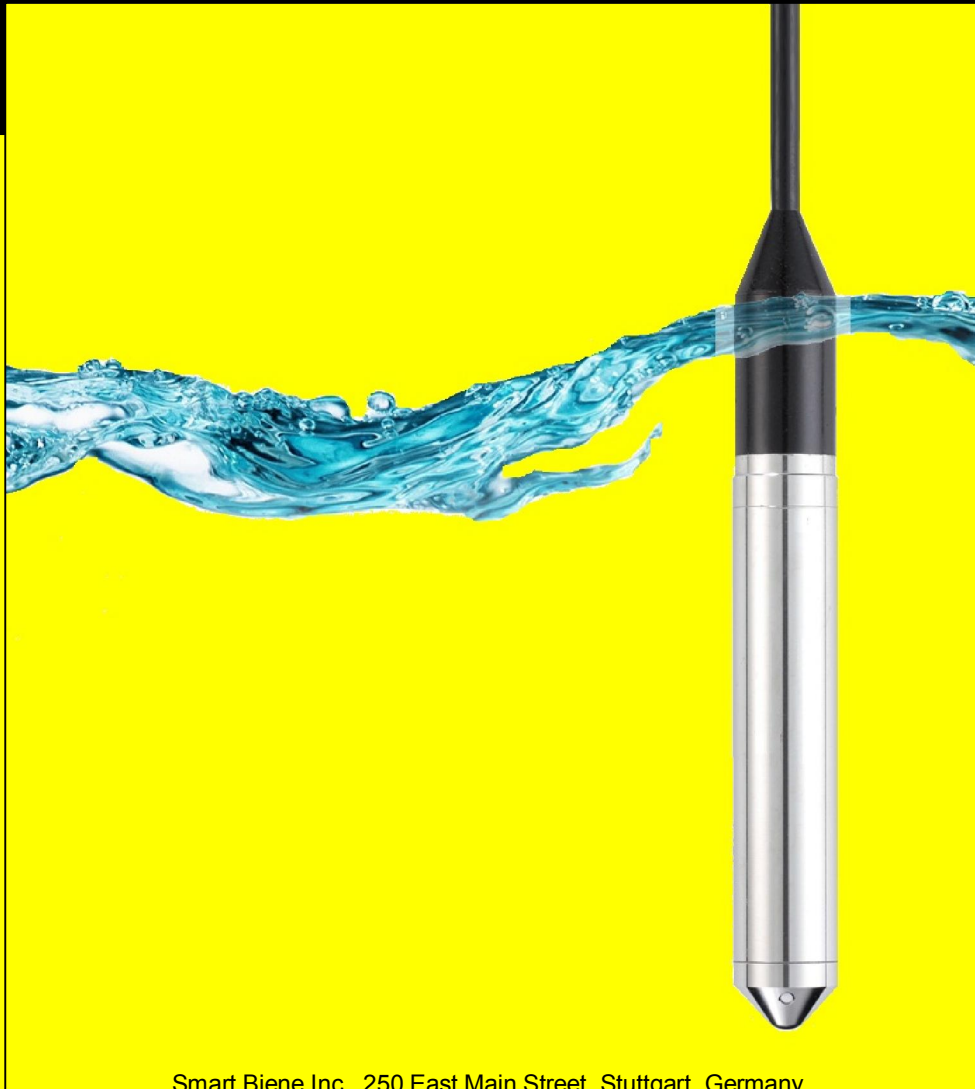

SOFTWARE

**SB-HL (01)** is Portable device software; you can connect your device to computer with USB Cable (USB to Micro-USB) and configure your device or see measured value plots, save data....:

**Min System Requirement:**

- CPU: 2GHz.
- Memory: 2GB RAM.
- Hard Drive: 80 MB available in the hard disk.
- Windows 8 or superior.
- USB2 Port.

**Software consists of three tabs:**

- **DATA (Real Time):** Display measured value with a real time graph. Start, pause and erase data logging. Saving text file or a plot image from logged data. Display alarms status, errors, main and max values of measured value.
- **Configuration:** In this tab you can get device configuration or change configuration and set them to device, also you can reset device using reset factory.
- **Info:** In info tab you can change Tag ID of device. You can see device serial number registered by **Smart Biene**.

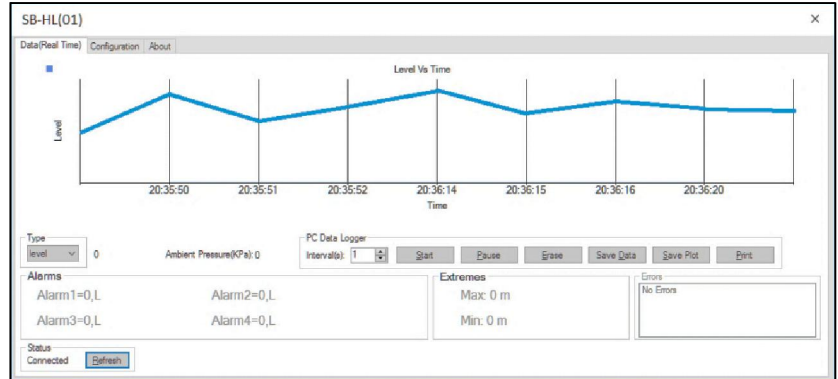


Figure 14 Device software- DATA (Real Time) Tab

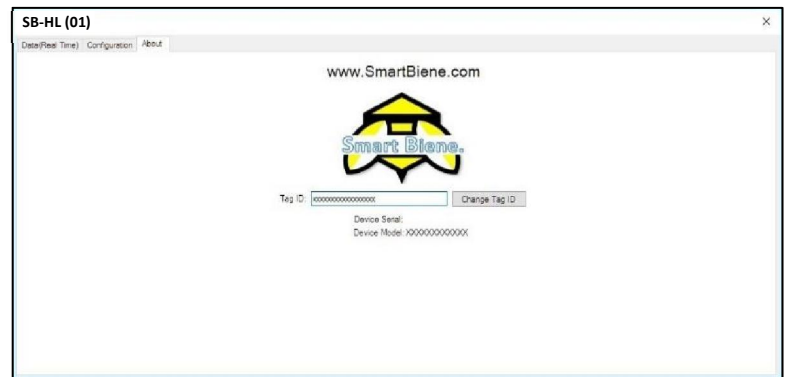


Figure 15 Device software- info Tab

Figure 16 Device software- Configuration Tab

**WWW.SMARTBIENE.COM**

**Smart Measurement.**

---

All specifications are subject to change without notice.  
All sales subject to standard terms and conditions.  
© Smart Biene Inc. 2012/09/15

Smart Biene Inc., 250 East Main Street, Stuttgart,  
Germany.  
Email: [info@smartbiene.com](mailto:info@smartbiene.com)